


# LOUVERS...


## FLLV, ADJUSTABLE FUSIBLE LINK LOUVERS

### 90 Minute Fire-Rated Steel Louvers

**IN STOCK  
FOR IMMEDIATE SHIPPING**

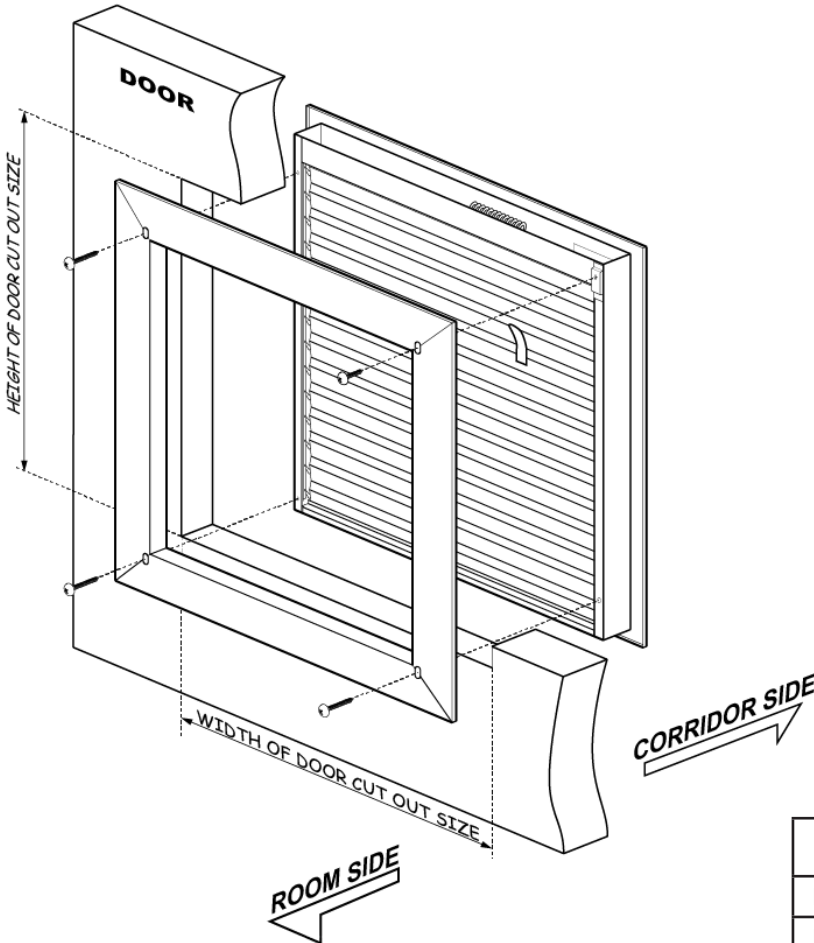

- ▶ For use in Fire Rated Door Applications under Positive and Neutral Pressure Intertek Testing Certification in Compliance to NFPA 252 (2000), UL 10C (2009), NFPA 252 (2012), CSI Code 089000 Louvers & Vents
- ▶ Fusible Link Design Temperature 165°F Max
- ▶ 16 Gauge Cold Rolled Steel Frame and Blades
- ▶ Mitered Welded Corner Frame Construction
- ▶ Free Flow Area: 45% Free
- ▶ 1 9/16" Deep Louver Assembly
- ▶ Cadmium Plated Steel Rivets
- ▶ Cadmium Plated Steel Tension Spring
- ▶ Door Size Thickness: 1 3/4" Only
- ▶ Baked on Powder Coat Finish
- ▶ Color: Standard Bronze
- ▶ Fasteners: 3 x 3/4" LG & 1 x 1/2" LG

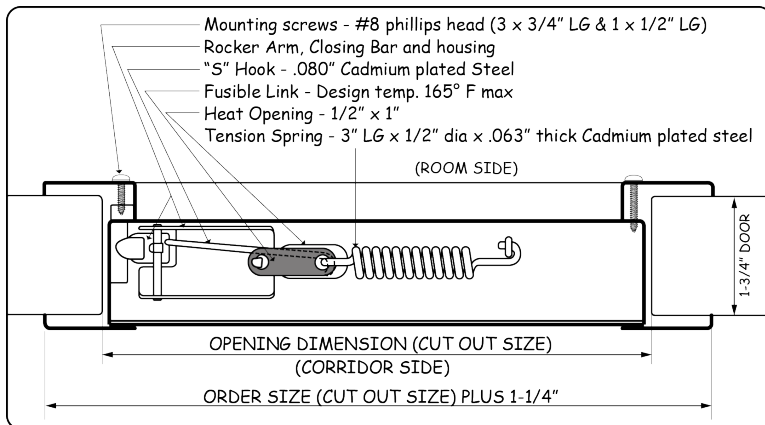

ITEM #	SIZES (DOOR CUTOUT)	PCS /CTN	
FLLV1212	12" x 12"	1	For pricing & availability inquiries contact your Local Distributor or click <a href="#">here</a> for the list of our Sales Representatives
FLLV1224	12" x 24"	1	
FLLV1812	18" x 12"	1	
FLLV1818	18" x 18"	1	
FLLV1824	18" x 24"	1	
FLLV2412	24" x 12"	1	
FLLV2418	24" x 18"	1	
FLLV2424	24" x 24"	1	

**Aluminum Insect Screens Available**

- Framed Aluminum Insect  
Ex. UAFLLV1212
- Unframed Aluminum Insect  
Ex. FAFLLV1212