


INSTRUCTIONS FOR CHANGING OF HANDING FOR 2260V AND F2260V SERIES VERTICAL RODS


BEFORE INSTALLING DEVICE, PLEASE CHECK:

1. IF DOOR IS FITTED AND HUNG
2. SIZE OF EXIT DEVICE, FUNCTION AND DESIGN ...
 - 2.1 36" DOORS, CAN BE CUT TO FIT DOORS DOWN TO 30" WIDE
 - 2.2 48" DOORS, CAN BE CUT TO FIT DOORS DOWN TO 36" WIDE
 - 2.3 HAND OF DEVICE AGAINST APPLICATION

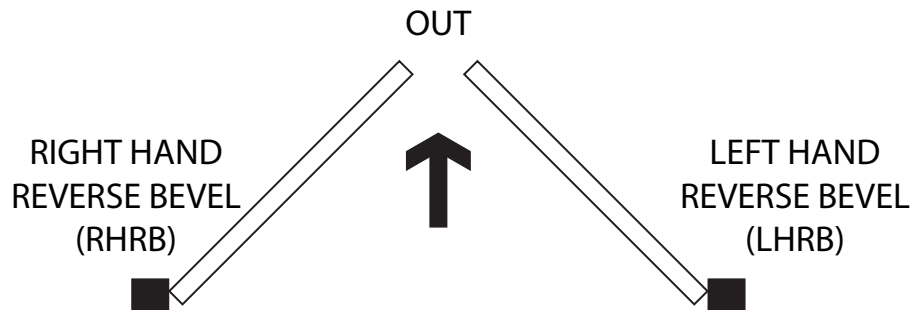

3. TO CHANGE HAND OF DEVICE

- 3.1 USE PIN 2-1/4" LONG TO KNOCK OUT LIFT LEVER PIN
- 3.2 REMOVE LIFT LEVER AND RE-ASSEMBLE OTHER END

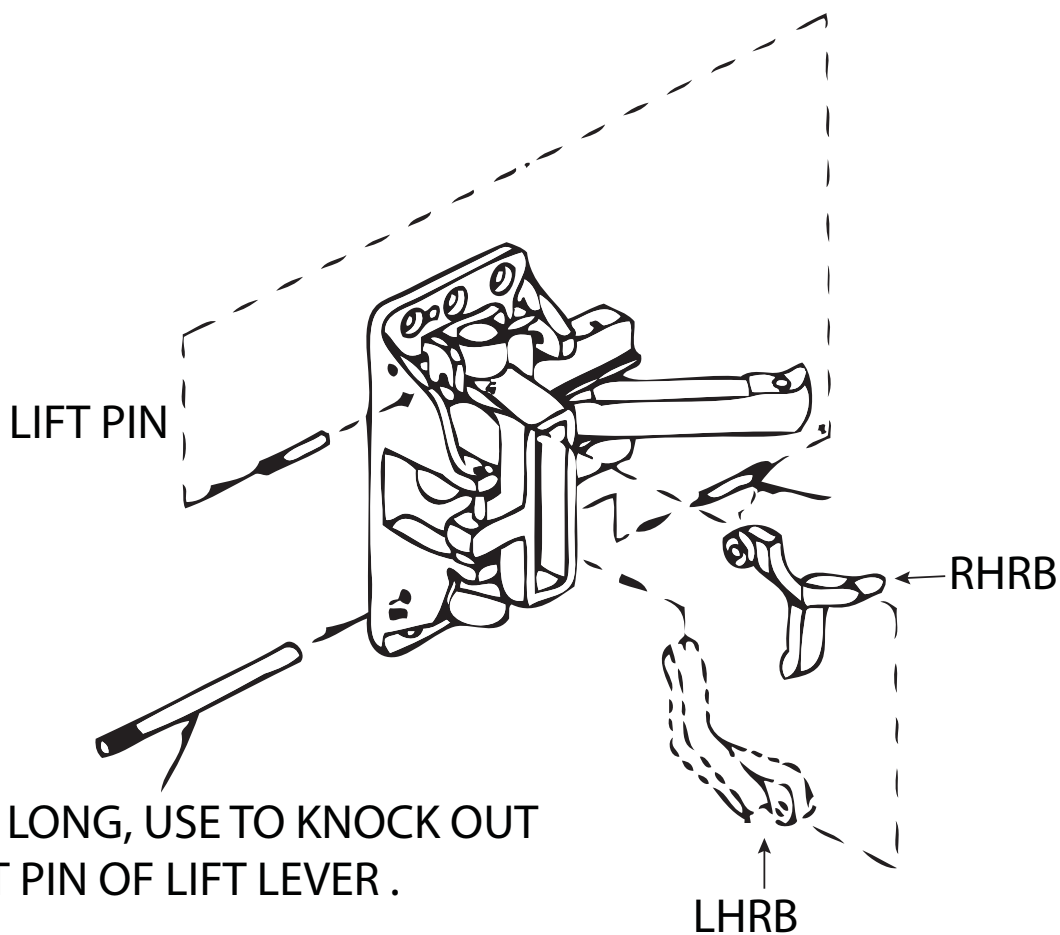

PIN, 2-1/4" LONG, USE TO KNOCK OUT
LIFT PIN OF LIFT LEVER .