




NM SERIES GRADE 1 MORTISE LOCK

FEATURES & SPECIFICATIONS

- For Doors..... 1 ¼"
- Backset..... 2 ¾"
- Lockcase..... Heavy gauge zinc chromate steel
- Front..... Heavy gauge steel 8" x 1 ¼" x 3/32"
Accommodates flat doors and doors beveled 1/8" in 2"
- Armored Front..... Wrought brass attached by machine screws to lock case front
- Deadbolt..... 1" throw, brass chrome-plated with hardened steel rollers
- Guard-bolt..... Extruded brass, chrome plated
- Stop-works..... Rocker type, brass, chrome-plated
- Strikes..... Brass, non-handed curve strike 4 7/8" x 1/4".
Curved-up strike available upon request
- Handing..... Handed. Easily field-reversible
- Trim..... See Lever / Knob Designs, Giro / Quadro rose (Page 2)
- Cylinder..... As specified
- Keyway..... As specified
- Finishes..... As specified
- UL Listing..... UL Listed "A" Label (3 hours), for use on fire doors, single or pair of doors. "F" mark stamped on strike
- ANSI..... Lock body conforms to Federal specification Type 86; and to all dimensional and operational performances of ANSI A156.13, Series 1000 Grade 1, exceeds 1,000,000 cycles

	MODEL	ANSI	AVAILABLE FUNCTIONS
	NM8050	F04	Office
	NM8070	F05	Classroom
	NM8080	F07	Storeroom
	NM8453	F20	Entrance
	NM8010	F01	Passage
	NM8040	F02 F19 F22	Privacy with Deadbolt
	NM8456	F13	Corridor / Exit
	NM8465	F65	Closet / Storeroom
	NM8473	F21	Dormitory / Bedroom

Other functions available with factory lead time and subject to minimum order

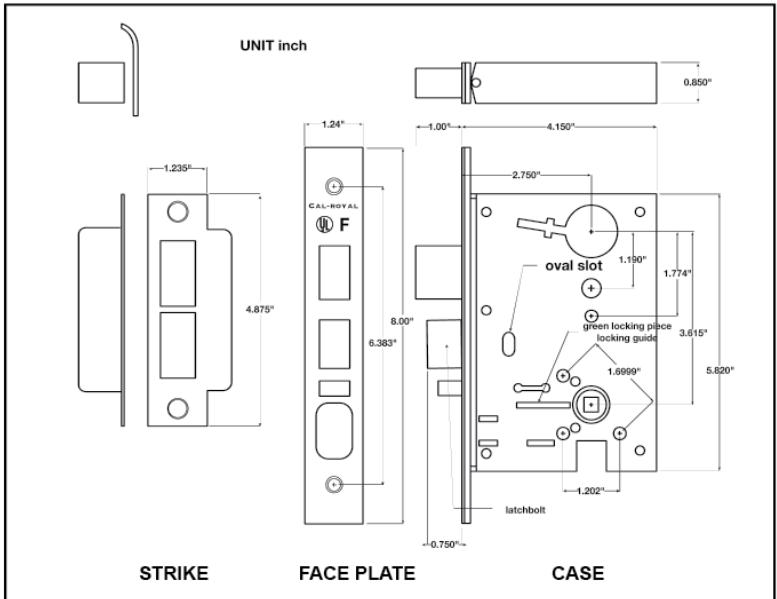

HOW TO ORDER:

MODEL NUMBER + HANDING + LEVER DESIGN + ROSE DESIGN + FINISH

REFER TO PAGES 86-87 FOR ROSE AND LEVER DESIGNS